


20SC

C-Models enable better leverage when handling tall timber with an extended tower and faster accumulation. They feature stronger, more durable cast arms contoured for maximum support when accumulating as well as an ultra-reliable disc drive with easily adjustable bearings.

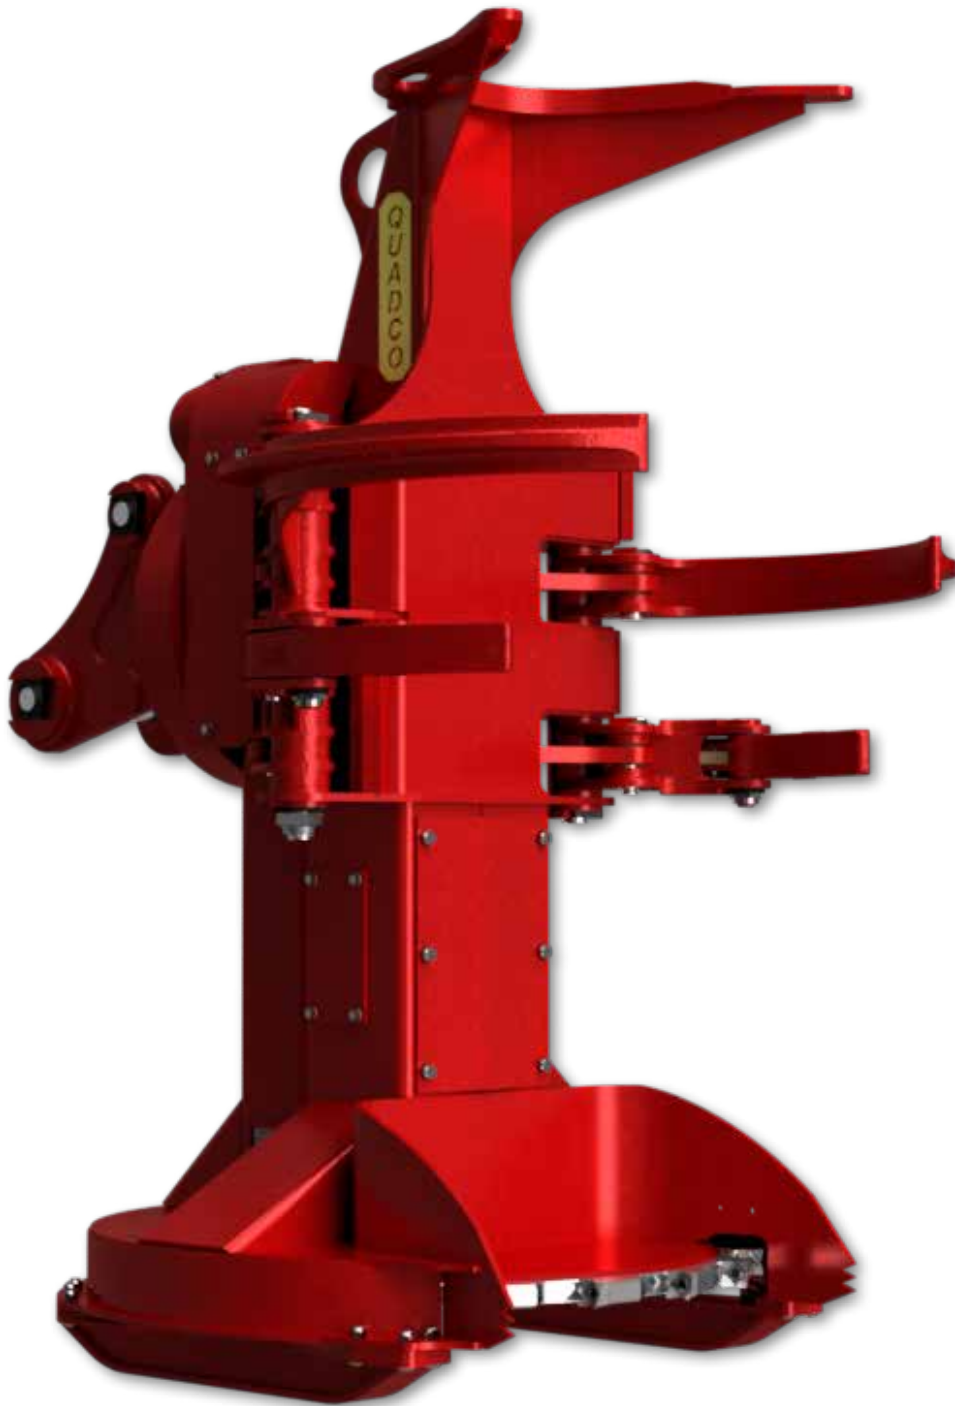

20SC

STANDARD CONFIGURATION

METRIC

IMPERIAL

WEIGHTS & DIMS.	Rotation 360° (<i>Medium Torque</i>)	2,540 kg	5,520 lbs
	Height	2,565 mm	101"
	Width	1,435 mm	56.5"
	Depth	1,346 mm	53"
	Maximum Throat Opening	940 mm	37"
	Maximum Throat Opening @ Teeth	889 mm	35"
	Accumulation Area (<i>Over Blade</i>)	0.40 m ²	4.3 ft ²

DISC	Cutting Capacity	508 mm	20"
	Tip-to-Tip Diameter	1,321 mm	52"
	Rated Saw Speed	1,250 rpm	
	Number of Teeth	18	
	Saw Kerf	51 mm	2"
	Weight (<i> HOLDERS & TEETH VARIES DEPENDING ON DISC</i>)	261 kg	575 lbs
	Style (<i>One Piece or Segmented</i>)	Both	

SAW DRIVE	Motor	Rexroth
-----------	-------	---------

HYD.	Grab Arms	1 Cylinder
	Accumulating Arms	1 Cylinder