


## 7000XT

With its large, high-torque feed motors, the 7000XT gives you up to 45kN / 11,600-lb. of feed force and delimiting power. High-flow hydraulics provide increased performance in any application and the toughest conditions.

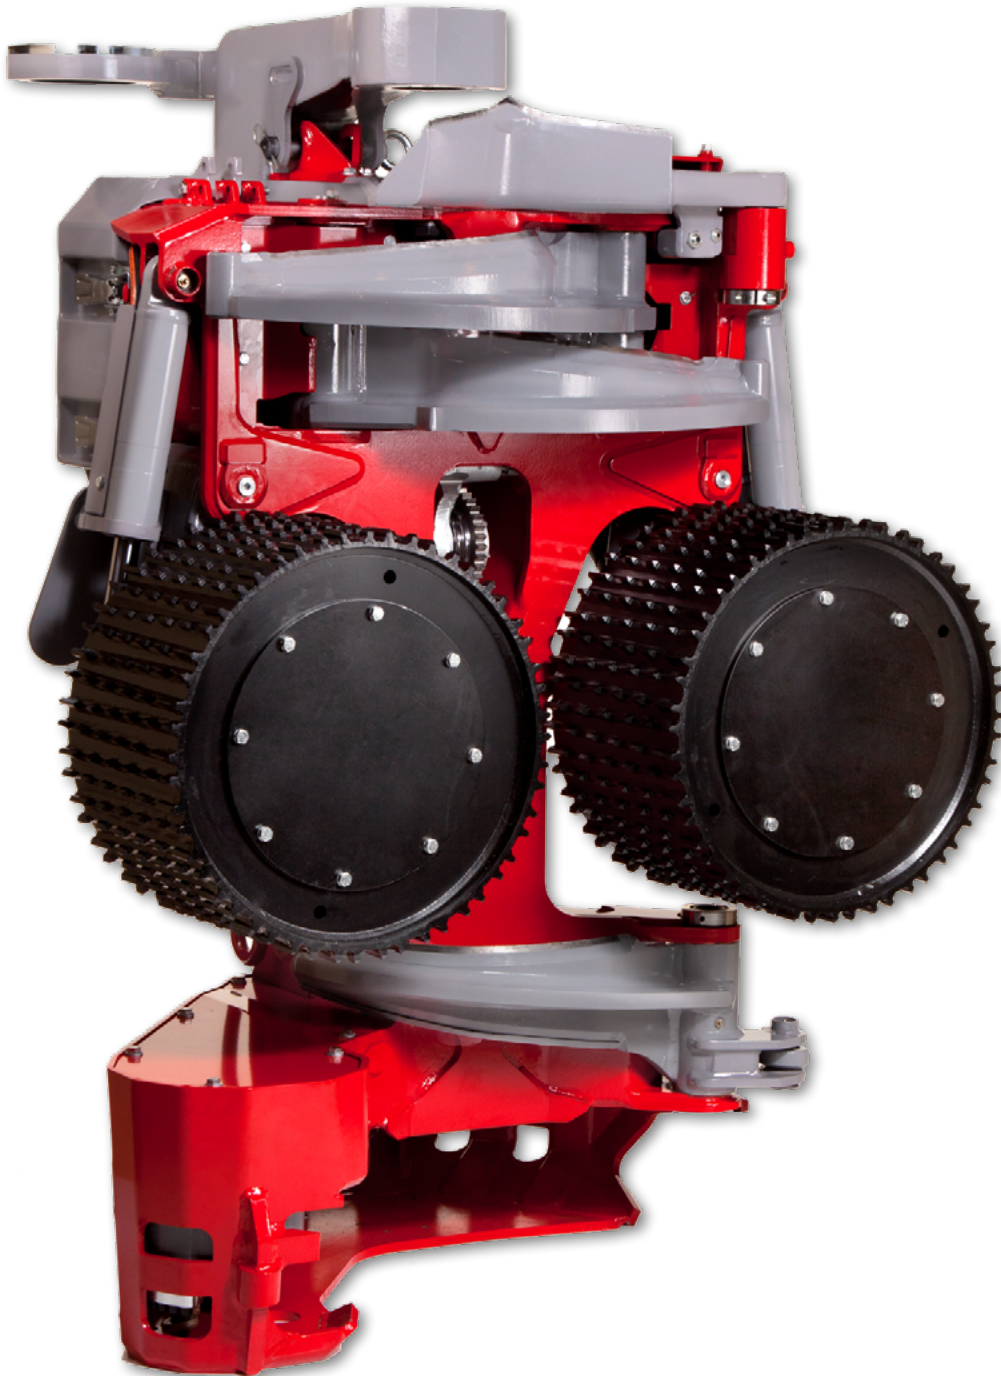

# 7000XT

## STANDARD CONFIGURATION

## METRIC

## IMPERIAL

WEIGHTS & DIMS.	Height ( <i>In Harvesting Position</i> )	2,174 mm	85.6"
	Height ( <i>Without Rotator &amp; Link</i> )	217.6 cm	57.5"
	Maximum Width ( <i>With Head Open</i> )	193.7 cm	51.2"
	Maximum Width ( <i>With Head Closed</i> )	132.9 cm	35.1"
	Degree of Rotation	Optional Continuous 360°	
DRIVE SECTION	Number of Drive Rollers	2	
	Motor Size ( <i>Drive Arm</i> )	1,259 cc	76.83 in <sup>3</sup>
	Motor Size ( <i>Variable Displacement</i> )	660 – 1,320 cc	40.2 – 80.55 in <sup>3</sup>
	Maximum Drive Roller Opening ( <i>Diameter</i> )	713 mm	28.07"
	Maximum Drive Roller Closing ( <i>Diameter</i> )	13 mm	0.5"
	Feed Speed	5.2 mps	17.1 fps
DELIMB SECTION	Number of Delimb Arms	3	
	Maximum Delimb Opening	772 mm	30.4"
	Maximum Delimb Full Coverage	560 mm	22"
	Minimum Delimb Closing ( <i>Diameter</i> )	40 mm	1.6"
BUTT SAW	Saw Type	418H	
	Maximum Cut ( <i>Diameter</i> )	65 cm   72.5 cm   80 cm	25.6"   28.5"   31.5"
	Bar Size	75 cm   82.5 cm   90 cm	29.5"   32.5"   35.5"
	Chain Pitch	0.404 mm	
	Motor Size	30 cc	1.83 in <sup>3</sup>
	Chain Auto Tension	No	
	Oil Tank Capacity	36 L	9.5 gal
TOP SAW	Maximum Cut ( <i>Diameter</i> )	48 cm	18.9"
	Bar Size	64 cm	25.2"
	Chain Pitch	0.404 mm	
	Motor Size	19 cc	1.16 in <sup>3</sup>
CARRIER REQS.	Carrier Size ( <i>Tracked</i> )	25 – 35 ton	
	Maximum Pressure	300 bar	4,351 psi
CONTROL SYSTEM	Model	Log Mate 510	
	Optional Additions	Yes	
	Full Optimization	Optional	
	Electronic Calipers ( <i>For Electronic Calibrations</i> )	Optional	
	Degree of Rotation	Continuous 360°	