


2900

Intermittent models are capable of shoveling wood, cutting individual large limbs, and topping large trees. They have an optional locking arms safety feature available for projects involving residential and critical environments. These heads are ideal for blow-down and right of way clearing due to their hold and cut tree control.

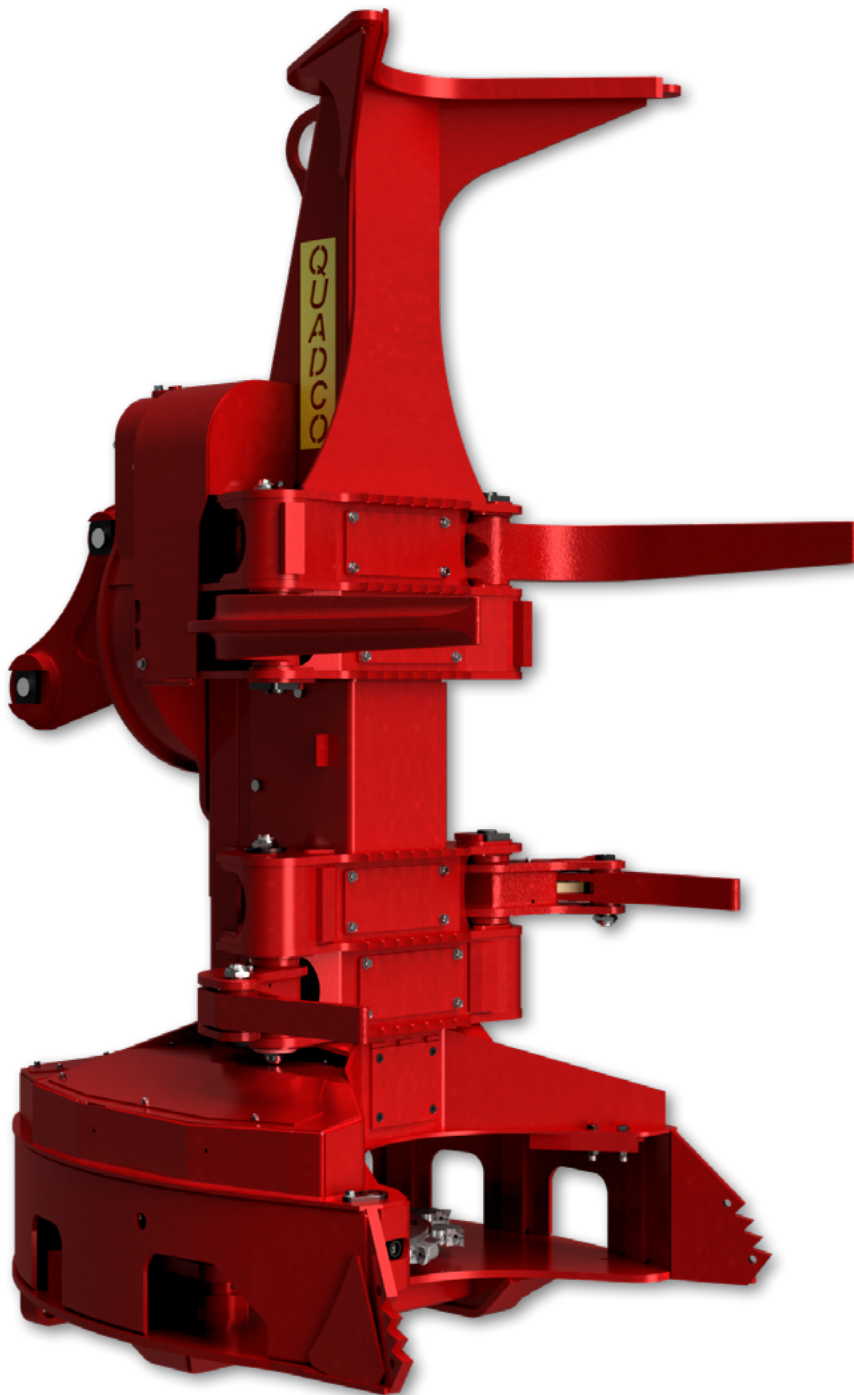

2900

STANDARD CONFIGURATION

METRIC

IMPERIAL

WEIGHTS & DIMS.		METRIC	IMPERIAL
WEIGHTS & DIMS.	Fixed Rotation	2,948 kg	6,500 lbs
	Rotation 40° (<i>High Torque</i>)	2,971 kg	6,550 lbs
	Rotation 360° (<i>High Torque</i>)	3,152 kg	6,950 lbs
	Height	3,048 mm	120"
	Width	1,346 mm	53"
	Depth	1,651 mm	65"
DISC	Cutting Capacity	737 mm	29"
	Rated Saw Speed @ 75 gpm / 3,800 psi	700 rpm	
	Number of Teeth	12	
	Saw Kerf	44 mm	1 3/4"
SAW DRIVE	Motors	Two 30cc Piston Type	
	Pinion	Dual	
	Rated Saw Speed		120 fps
CARRIER REQS.	Carrier Size		25 ton & plus
	PSI Working Pressure	248 – 276 bars	3,600 – 4,000 psi
	Valve Section Saw Circuit	284 lpm	75 gpm
	Low Flow Valves for Arms & Rotator	Yes	