


7000C

The Log Max 7000C Harvesting Head is built on a tough frame and combines high drive power and high speed. This head performs very well on heavy and branchy trunks.

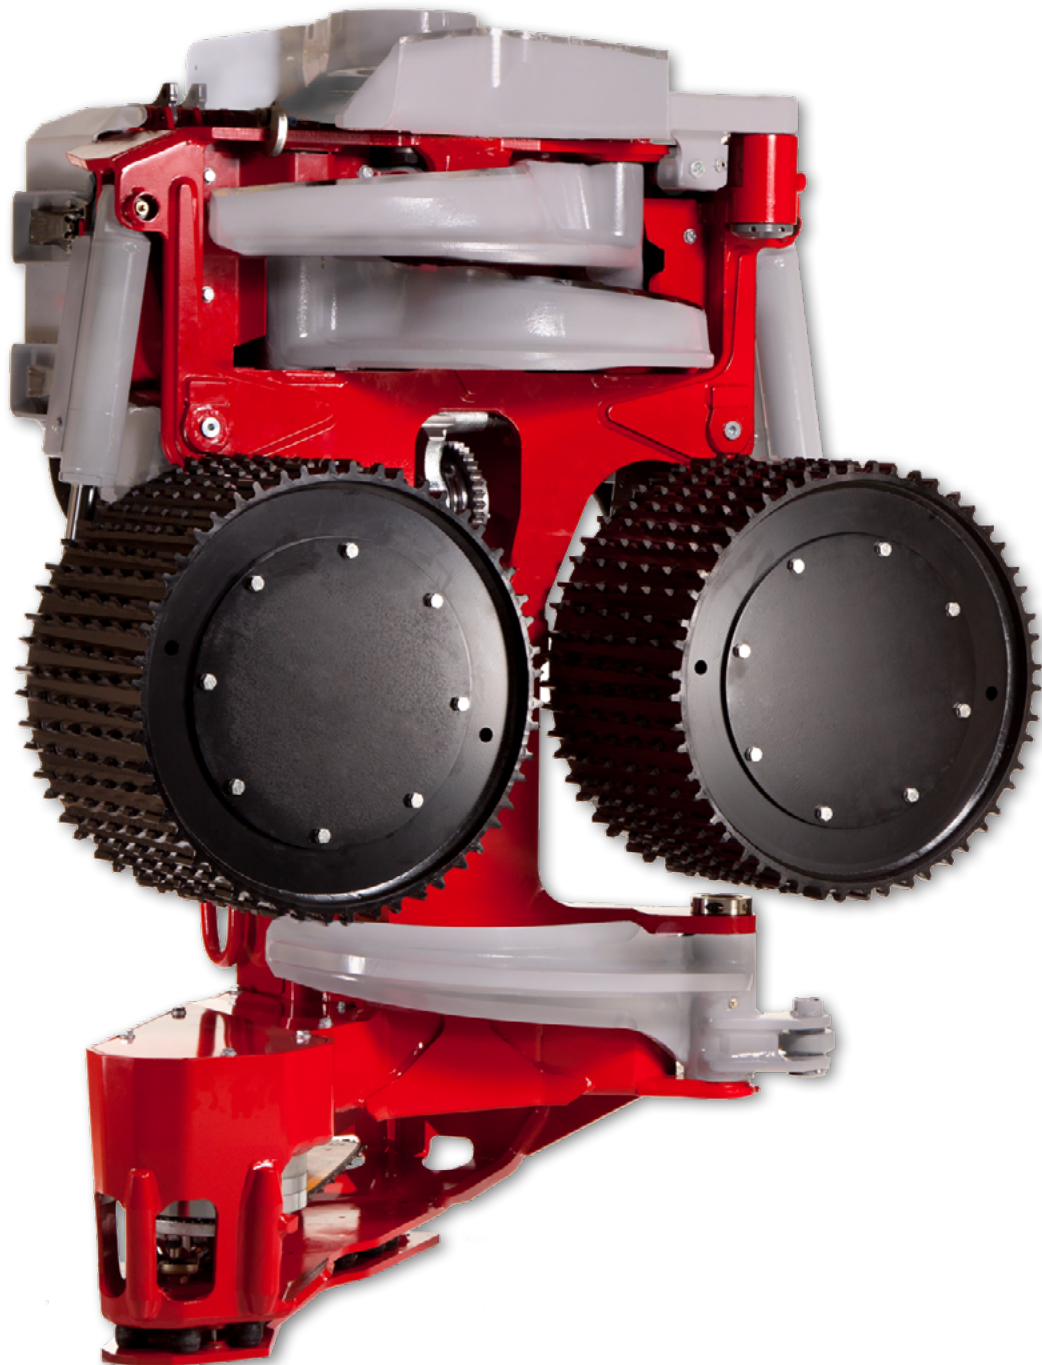

7000C

STANDARD CONFIGURATION

METRIC

IMPERIAL

WEIGHTS & DIMS.	Weight (Including Rotator Top & Link)	1,627 kg	3,586 lbs
	Height (Without Rotator & Link)	174 cm	68.5"
	Maximum Width (With Head Open)	193.7 cm	76.25"
	Maximum Width (With Head Closed)	131.5 cm	51.8"
	Degree of Rotation	Optional Continuous 360°	

DRIVE SECTION	Number of Drive Rollers	2	
	Motor Size (Drive Arm)	1,147 cc	69.99 in ³
	Motor Size (Variable Displacement)	660 – 1,320 cc	40.2 – 80.55 in ³
	Maximum Drive Roller Opening (Diameter)	713 mm	28.07"
	Maximum Drive Roller Closing (Diameter)	13 mm	0.5"
	Feed Speed	5.2 mps	17 fps

DELIMB SECTION	Number of Delimb Arms	3	
	Maximum Delimb Opening	772 mm	30.4"
	Maximum Delimb Full Coverage	560 mm	22"
	Minimum Delimb Closing (Diameter)	40 mm	1.6"

BUTT SAW	Saw Type	98XL	
	Maximum Cut (Diameter)	65 cm 72 cm 75 cm	25.6" 28.4" 29.5"
	Bar Size	75 cm 82 cm 90 cm	29.5" 32.3" 35.5"
	Chain Pitch	0.404 mm	0.016"
	Motor Size	19 cc	1.16 in ³
	Chain Auto Tension	No	
	Oil Tank Capacity	36 L	9.5 gal

CARRIER REQS.	Carrier Size (Tracked)	21 – 25 ton	
	Carrier Size (Wheeled)	18 – 25 ton	
	Maximum Pressure	300 bar	4,351 psi

CONTROL SYSTEM	Model	Log Mate 510	
	Optional Additions	Yes	
	Full Optimization	Optional	
	Electronic Calipers (For Electronic Calibrations)	Optional	
	Degree of Rotation	Continuous 360°	